
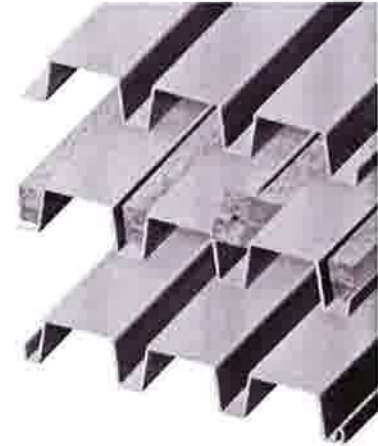


3 N, NI, NA*, NIA*

Maximum Sheet Length 42'-0"
 Extra Charge for Lengths Under 6'-0"
 ICC ER-3415

Factory Mutual Approved
 Deck type & gauge — Max. deck span
 3N22, 3NI22..... 12'-0"
 3N20, 3NI20..... 13'-5"
 3N18, 3NI18..... 15'-10"
 3N16, 3NI16..... 18'-1"
 FM Approvals No. 3029260

* Acoustical Deck is not approved by Factory Mutual

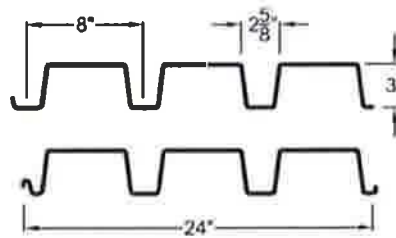

Interlocking side lap is not drawn to show actual detail.

SECTION PROPERTIES

Deck type	Design thickness in.	W psf	Section Properties				V _a lbs/ft	F _y ksi
			I _p	S _p	I _n	S _n		
			in ⁴ /ft	in ³ /ft	in ⁴ /ft	in ³ /ft		
N22	0.0295	2.26	0.659	0.382	0.884	0.433	2232	33
N20	0.0358	2.71	0.848	0.501	1.079	0.552	3287	33
N19	0.0418	3.15	1.045	0.597	1.260	0.659	4217	33
N18	0.0474	3.56	1.238	0.688	1.430	0.749	4771	33
N16	0.0598	4.46	1.683	0.893	1.807	0.944	5988	33

ACOUSTICAL INFORMATION

Deck Type	Absorption Coefficient						Noise Reduction Coefficient ¹
	125	250	500	1000	2000	4000	
3NA, 3NIA	.18	.39	.88	.93	.58	.39	0.70

¹ Source: Riverbank Acoustical Laboratories.
 Test was conducted with 1.50 pcf fiberglass batts and 2 inch polyisocyanurate foam insulation for the SDI.

Acoustical deck (Type 3 NA, NIA) is particularly suitable in structures such as auditoriums, schools and theaters where sound control is desirable. Acoustic perforations are located in the vertical webs where the load carrying properties are negligibly affected (less than 5%).

Inert, non-organic glass fiber sound absorbing batts are placed in the rib openings to absorb up to 70% of the sound striking the deck.

Batts are field installed and may require separation.

VERTICAL LOADS FOR TYPE 3N

No. of Spans	Deck Type	Max. SDI Const. Span	Allowable Total (PSF) / Load Causing Deflection of L/240 or 1 inch (PSF)										
			Span (ft.-in.) ctr to ctr of supports										
			10-0	10-6	11-0	11-6	12-0	12-6	13-0	13-6	14-0	14-6	15-0
1	N22	11'-7"	50 / 43	46 / 37	42 / 32	38 / 28	35 / 25	32 / 22	30 / 20	28 / 18	26 / 16	24 / 14	22 / 13
	N20	13'-2"	66 / 56	60 / 48	55 / 42	50 / 37	46 / 32	42 / 28	39 / 25	36 / 23	34 / 20	31 / 18	29 / 16
	N19	14'-7"	79 / 69	71 / 59	65 / 51	59 / 45	55 / 40	50 / 35	47 / 31	43 / 28	40 / 25	37 / 22	35 / 20
	N18	15'-11"	91 / 81	82 / 70	75 / 61	69 / 53	63 / 47	58 / 42	54 / 37	50 / 33	46 / 30	43 / 27	40 / 24
	N16	18'-6"	118 / 110	107 / 95	97 / 83	89 / 73	82 / 64	75 / 58	70 / 50	65 / 45	60 / 40	56 / 36	52 / 33
2	N22	13'-8"	56 / 122	51 / 105	47 / 92	43 / 80	39 / 71	36 / 62	34 / 55	31 / 50	29 / 44	27 / 40	25 / 36
	N20	15'-6"	72 / 152	65 / 131	60 / 114	55 / 100	50 / 88	46 / 78	43 / 69	40 / 62	37 / 55	34 / 50	32 / 45
	N19	16'-11"	86 / 182	78 / 157	71 / 137	65 / 120	60 / 105	55 / 93	51 / 83	47 / 74	44 / 66	41 / 60	38 / 54
	N18	18'-1"	98 / 211	89 / 182	81 / 158	74 / 139	68 / 122	63 / 108	58 / 96	54 / 86	50 / 77	47 / 69	44 / 62
	N16	20'-4"	123 / 276	112 / 239	102 / 207	93 / 181	86 / 159	79 / 141	73 / 125	68 / 112	63 / 100	59 / 90	55 / 82
3	N22	13'-8"	69 / 95	64 / 82	58 / 72	53 / 63	49 / 55	45 / 49	42 / 43	39 / 39	36 / 35		
	N20	15'-6"	90 / 119	81 / 103	74 / 90	68 / 78	63 / 69	58 / 61	53 / 54	50 / 48	46 / 43		
	N19	16'-11"	107 / 143	97 / 123	89 / 107	81 / 94	75 / 83	69 / 73	64 / 65	59 / 58	55 / 52		
	N18	18'-1"	122 / 165	111 / 143	101 / 124	92 / 109	85 / 96	78 / 84	72 / 75	67 / 67	63 / 60		
	N16	20'-4"	154 / 216	139 / 186	127 / 162	116 / 142	107 / 125	99 / 111	91 / 98	85 / 88	79 / 79		

Notes: 1. Minimum exterior bearing length required is 1.50 inches. Minimum interior bearing length required is 3.00 inches. If these minimum lengths are not provided, web crippling must be checked.

